

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(10) International Publication Number
WO 03/076715 A2

- [Continued on next page]*

The diagram shows a cross-sectional view of a detector system. A central rectangular region is labeled 2. To its left is a vertical rectangular plate labeled 3, which is connected to a ground symbol. Above the central region is a horizontal rectangular plate labeled 4. Dashed lines represent the paths of particles or ions, originating from various points within the central region 2 and converging towards a small rectangular detector element on the right. The paths are deflected by the electric fields of the plates 3 and 4.

(57) Abstract: The invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes. The electrodes are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate. In the method of the invention, the particles of the powder are pre-charged before bringing them into the electric field.

WO 03/076715 A2



Published:

— *without international search report and to be republished
upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for treating powdery particles

5 The present invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes, which are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate.

10

The dry surface treatment process of different substrates, such as paper, board, plastic, or metallic substrates, comprises dry powder application followed by a finishing step, for example thermomechanical fixing. The application of the powder utilises an electric field to transfer the powder particles to the surface of the substrate and to enable an electrostatic adhesion prior to the finishing. Both the final adhesion and the surface smoothening of the dry powder are executed simultaneously through thermomechanical treatment or another suitable treatment. The powder, which is used, may be a coating composition comprising inorganic particles and binder particles, or a film forming material, which can be finished so that a pinhole-free film layer is formed.

15

20

25 In a dry surface treatment process, the charging of the powder has an essential role. If some inadequacies relating an amount of the charged particles, or a level of charging of a particle occur, it has an effect on efficiency and a cleanliness of the process. If the particles of the dry powder do not adhere properly to a substrate it causes an uneven powder layer on the substrate, dusting, material losses, and possibly harmful deposits.

30

The method of the invention is an enhancement to the dry surface treatment process, and it diminishes the above-mentioned problems of the dry surface treatment process. The method is characterized in that the particles of the powder are pre-charged before bringing them into the electric field.

35

2

The method of the invention makes the efficiency of the dry surface treatment process better because the dry powder places itself on the substrate properly, and no material losses occur. As a consequence, also a coating layer of a higher quality is achieved. A clean process without dusting is also attained.

In a dry surface treatment process, an electric field is created between electrodes, which are in different potentials. A substrate to be coated is between the electrodes. At least one of the electrodes may be a corona charging electrode which charges surrounding gas. The charged gas atoms, molecules or molecule groups attach to particles of the coating powder, thus giving a charge to the particle.

A force according to the equation $\vec{F} = q \vec{E}$, where \vec{E} is an electric field, F is the force, and q is a charge, has an influence on a charge q in an electric field E . The force tends to convey the charge in the electric field, and in a stationary electric field only a position of the charge is meaningful. When a potential of the electric field is known, the strength of the electric field in a certain position is derived from the following equation:

$$\vec{E} = - \frac{\partial V}{\partial n} \vec{u}_n,$$

where

25	\vec{E}	is the strength of the electric field,
	V	is the potential of the electric field, and
	\vec{u}_n	is the unit vector of the perpendicular of the plane.

The strength of the electric field can also be evaluated by the electric charge density when the relation between the electric flux density and the strength of the electric field is taken into consideration. The equation below is Gauss's law.

$$\frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z} = \frac{\rho}{\varepsilon},$$

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076715 A2

- (51) International Patent Classification⁷: **D21H**
- (21) International Application Number: PCT/FI03/00180
- (22) International Filing Date: 11 March 2003 (11.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20020479 14 March 2002 (14.03.2002) FI
20021253 26 June 2002 (26.06.2002) FI

(71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PUTKISTO, Kaisa** [FI/FI]; Poukamankatu 7 C 8, FIN-33720 Tampere (FI).
MAIJALA, Juha [FI/FI]; Messukyläinkatu 37 B 12,

FIN-33700 Tampere (FI). **KÄSMÄ, Veli** [FI/FI]; Lintuvidankatu 33 G 26, FIN-33340 Tampere (FI).


(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY;** Hermiankatu 12 B, FIN-33720 Tampere (FI).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR TREATING POWDERY PARTICLES

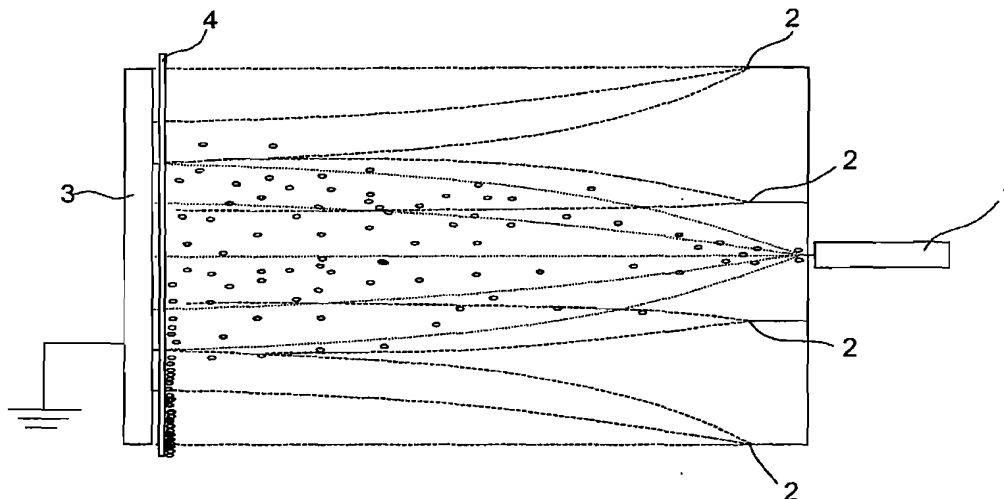

(57) Abstract: The invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes. The electrodes are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate. In the method of the invention, the particles of the powder are pre-charged before bringing them into the electric field.

WO 03/076715 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for treating powdery particles

5 The present invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes, which are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate.

10

The dry surface treatment process of different substrates, such as paper, board, plastic, or metallic substrates, comprises dry powder application followed by a finishing step, for example thermomechanical fixing. The application of the powder utilises an electric field to transfer the powder particles to the surface of the substrate and to enable an electrostatic adhesion prior to the finishing. Both the final adhesion and the surface smoothening of the dry powder are executed simultaneously through thermomechanical treatment or another suitable treatment. The powder, which is used, may be a coating composition comprising inorganic particles and binder particles, or a film forming material, which can be finished so that a pinhole-free film layer is formed.

15

20

25 In a dry surface treatment process, the charging of the powder has an essential role. If some inadequacies relating an amount of the charged particles, or a level of charging of a particle occur, it has an effect on efficiency and a cleanliness of the process. If the particles of the dry powder do not adhere properly to a substrate it causes an uneven powder layer on the substrate, dusting, material losses, and possibly harmful deposits.

30

35 The method of the invention is an enhancement to the dry surface treatment process, and it diminishes the above-mentioned problems of the dry surface treatment process. The method is characterized in that the particles of the powder are pre-charged before bringing them into the electric field.

2

The method of the invention makes the efficiency of the dry surface treatment process better because the dry powder places itself on the substrate properly, and no material losses occur. As a consequence, also a coating layer of a higher quality is achieved. A clean process without dusting is also attained.

In a dry surface treatment process, an electric field is created between electrodes, which are in different potentials. A substrate to be coated is between the electrodes. At least one of the electrodes may be a corona charging electrode which charges surrounding gas. The charged gas atoms, molecules or molecule groups attach to particles of the coating powder, thus giving a charge to the particle.

A force according to the equation $\vec{F} = q \vec{E}$, where \vec{E} is an electric field, F is the force, and q is a charge, has an influence on a charge q in an electric field E . The force tends to convey the charge in the electric field, and in a stationary electric field only a position of the charge is meaningful. When a potential of the electric field is known, the strength of the electric field in a certain position is derived from the following equation:

$$\vec{E} = - \frac{\partial V}{\partial n} \vec{u}_n,$$

where

\vec{E} is the strength of the electric field,
 V is the potential of the electric field, and
 \vec{u}_n is the unit vector of the perpendicular of the plane.

The strength of the electric field can also be evaluated by the electric charge density when the relation between the electric flux density and the strength of the electric field is taken into consideration. The equation below is Gauss's law.

$$\frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z} = \frac{\rho}{\epsilon},$$

where

- 5 $E_{x,y,z}$ are the dimensional strengths of the electric field,
 ρ is a local electric charge density, and
 ε is the dielectric constant of the examined space.

10 As seen from the equation above, in a stationary electric field the charges create the field, and the distribution and the magnitude of the charges determine the strength of the field in different positions.

15 If a conductive particle (radius a , charge q) is exposed to an uniform electric field E_0 in a unipolaric ion concentration N_0 , the electric field at the particle is formed from two components, namely an electric field created by the particle itself due to its own charge, and an outer electric field which is changed by the charge of the particle. This field is described by an equation

20
$$E = 3E_0 \cos\theta - \frac{q}{4\pi\varepsilon_0 a^2}$$

where

- 25 E is the resultant electric field,
 θ is the incidence angle of the electric field focused to a particle,
 ε_0 is the dielectric constant of the free space,
 a is the diameter of the particle, and
 q is the charge of the particle.

30 The term $3E_0 \cos\theta$ describes the change of the electric field as a consequence of the presence of the conductive particle. E_0 is the undisturbed field. The charging of the particles is great, and it is restricted only by the ions conveyed onto the particle by the electric field. The change of the charge is defined as a stream, and it can be
35 described by the equation

$$\frac{dq}{dt} = N_0 e b \int_{\theta}^{\theta_0} \left(3E_0 \cos\theta - \frac{q}{4\pi \epsilon_0 a^2} \right) dA \quad (4)$$

where

- 5 q is the charge of the particle,
 b is the mobility of ion,
 e is the charge of the electron,
 θ_0 is the critical angle of to the particle streaming charge,
 dA is the area of the component $= 2 \pi a^2 \sin\theta d\theta$, and
 10 t is time

The above mentioned equation shows that the charge continues to stream to the particle until the field created by the particle and the outer field are balanced out. When a saturation charge is known, the level of charging can be derived from the equation

$$q(t) = q_s \frac{1}{1 + \tau/t}$$

where $\tau = 4\epsilon_0/N_0eb$

20

For conductive materials, the saturation charge is $q_s = 12\pi a^2 \epsilon_0 E_0$. For non-conductive materials, to the equation shall be added $3\kappa/(\kappa+2)$.

The diffusion charge has also an effect on the particle. As a function of time, the diffusion charge can be expressed by the equation

25

$$q(t) = \frac{akT}{e} \ln \left(1 + \frac{\pi a v N_0 e^2 t}{kT} \right)$$

where

30

- k is Boltzman's constant,
 T is the temperature (K),
 e is the charge of the electron,
 v is the thermal velocity of ions (rms),

5

N_0 is the average amount of molecules in a certain volume,
and
 t is time.

5

As can be concluded from the above mentioned equations, time is an important factor in charging of particles.

10 The pre-charging of the particles of the coating powder can be made either when the particles are brought at the final electric field or before bringing them into the final electric field. The aim of the pre-charging is to obtain a longer charging period compared to the process having only one charging step. The benefits of the longer charging period are a more homogenous charging level and a greater force of the electric
15 field having influence on the particle.

The first embodiment of the invention is to pre-charge the particles of the coating powder when they are about to arrive into the final electric field. The pre-charging process is conducted in such a way that at least
20 one charging electrode comprising a feeding nozzle is located farther away from the substrate to be coated. The dry powder is led to the charging electrode, and particles of the dry powder are charged by the charging electrode. After that the pre-charged particles enter to the final electric field formed by the other charging electrodes, for example
25 corona charging electrodes, and a grounding electrode, or an electrode having an opposite sign. The pre-charged particles are blown towards a substrate to be coated. The substrate is preferably in a web form. The grounding electrode can be a stationary platy electrode, or it can be a roll rotating about its axis. The rotating roll is a preferred choice.

30

The second embodiment of the invention is to pre-charge the particles of the coating powder in another electric field(s) before the final electric field. In this embodiment, a dry powder is led first to a separate electric
35 field and after that to the final electric field. Particles of the dry powder are pre-charged in a charging unit comprising a corona charging electrode, an electrode having a different potential compared to the

corona charging electrode (e.g. a grounding electrode, an electrode in a lower or opposite potential), and a feeding nozzle.

5 Particles may also be charged by triboelectric charging, for example charging the particles by a friction between the particles, and walls of a transfer pipe, or a storage bin. After that the particles enter to another charging unit, which conducts the final charging of the particles. The final electric field is formed by electrodes at opposite sides of the substrate. The electrodes can be corona charging electrodes and a
10 grounding electrode, other suitable electrodes and a grounding electrode, or electrodes being in different potentials at opposite sides of the substrate. The pre-charged particles are blown towards a substrate to be coated through a nozzle.

15 In the following, the invention will be described by means of figures. In figures,

Fig. 1. shows the first embodiment of the invention, and

20 Fig. 2. shows the second embodiment of the invention.

According to Fig.1, a dry powder is led to a charging electrode 1 comprising a feeding nozzle. Particles of the dry powder are charged by the charging electrode 1. The charging electrode is located farther
25 from other electrodes 2 so that the particles are pre-charged when they enter to the final electric field formed by the corona charging electrodes 1, 2 and a grounding electrode 3. The pre-charged particles are blown towards a substrate 4 to be coated. The substrate 4 is preferably in a web form. The grounding electrode 3 can be a stationary platy
30 electrode, or it can be a roll rotating about its axis. The rotating roll is a preferred choice.

According to Fig. 2, a dry powder is led to a first electric field and after that to a second electric field. Particles of the dry powder are charged
35 in a charging unit 7 comprising a corona charging electrode 6, a grounding electrode 5, and a feeding nozzle 8. The particles are pre-charged in the first electric field created in the charging unit 7 before

7

entering to the second electric field formed by the corona charging electrodes 2 and a grounding electrode 3. The pre-charged particles are blown towards a substrate 4 to be coated. As in the embodiment shown in Fig. 1, the remarks concerning the form of the substrate 4 and the preferred grounding electrode 3 are also valid in this embodiment.

The invention is not restricted to the description above, but the invention may vary within the scope of the claims.

10

Claims:

1. A method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes, which are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate, **characterized** in that the particles of the powder are pre-charged before bringing them into the electric field.
2. The method according to claim 1, **characterized** in that at least one first electrode comprising a feeding nozzle is located at a longer distance from the substrate than the other electrode/s at the same side in such a manner that the pre-charging is effected.
3. The method according to claim 1, **characterized** in that a separate electric field is created outside the electric field created between the first and second electrode/s at the side of the substrate to be coated by the powder particles, and the pre-charging is effected in the separate electric field.
4. The method according to claim 3, **characterized** in that the separate electric field is created in a charging unit comprising a corona charging electrode, a grounding electrode and a feeding nozzle.

1/2

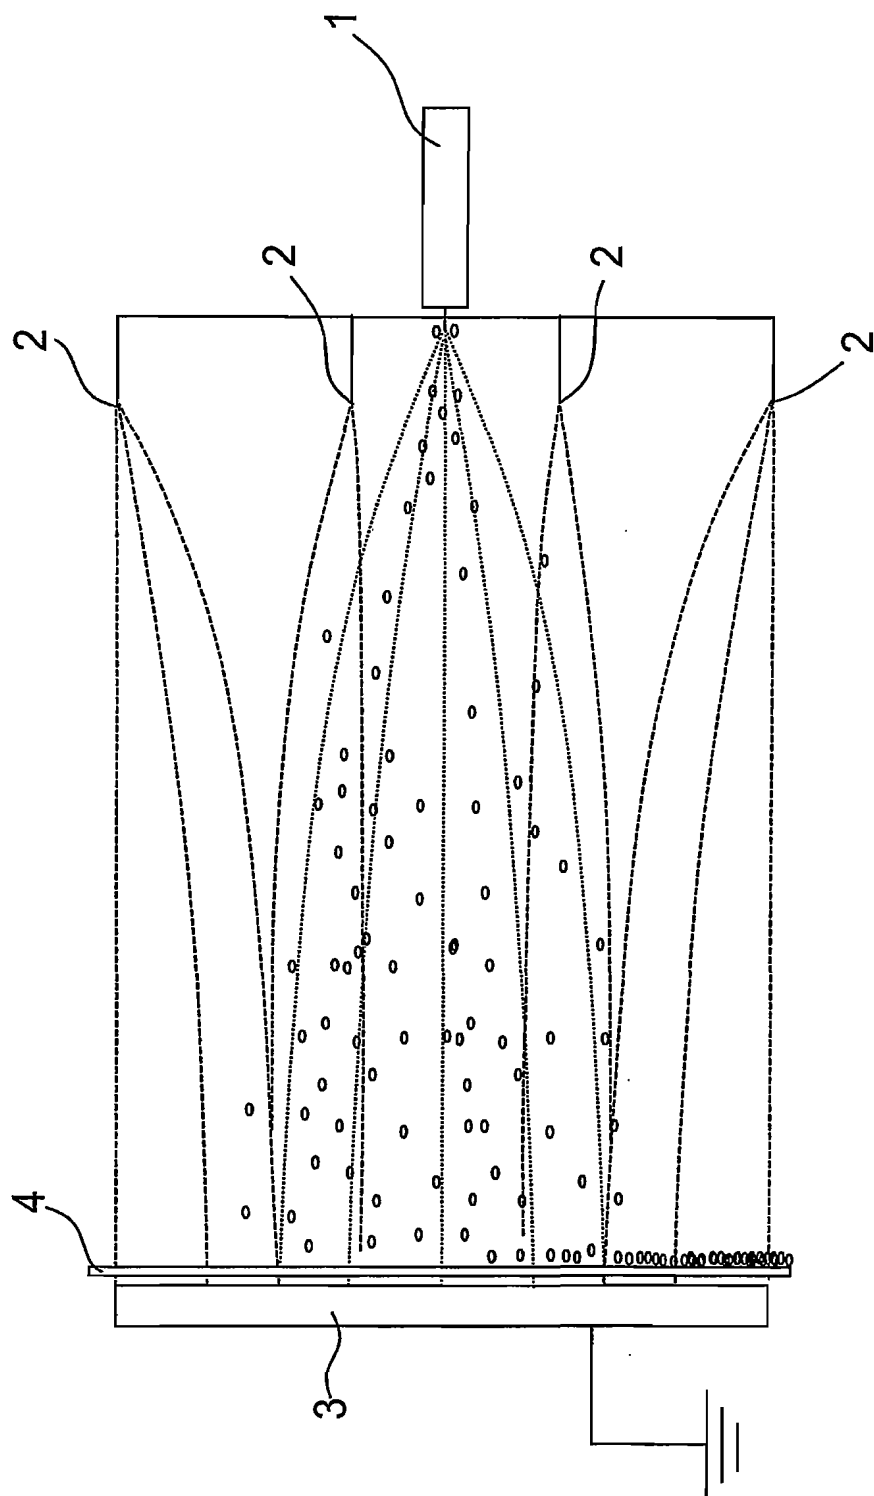


Fig. 1

2/2

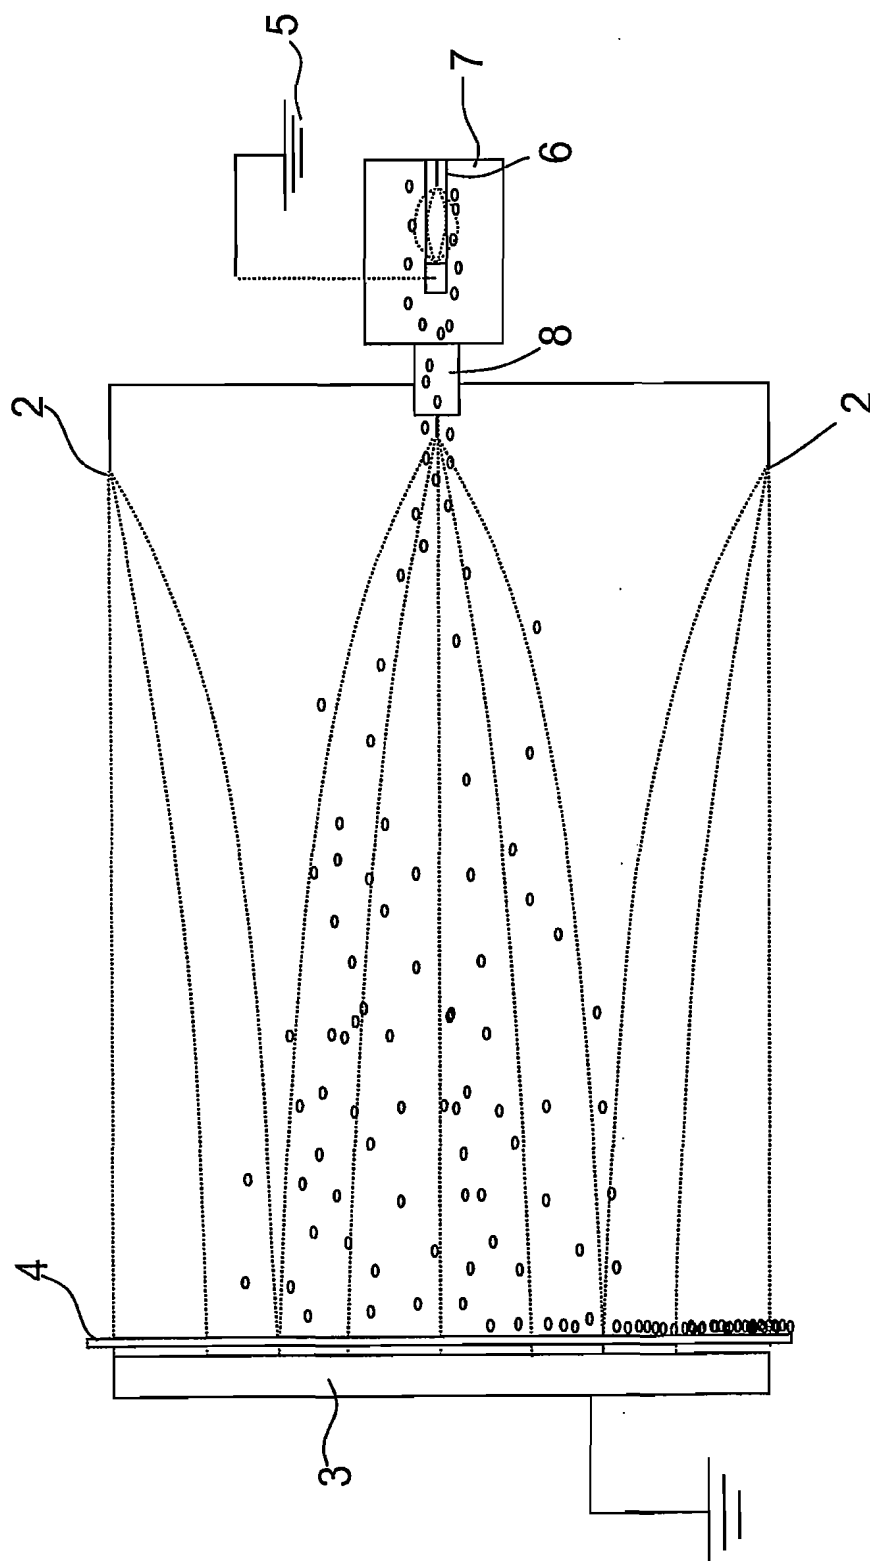


Fig. 2